NEW6260 Wireless POS Terminal

C

C

NEWPOS

1 or 2 ABC 3 OFF 0

4 and 5 Jac 6

7 PRS 8TUV

0:#


ALPHAT


Make payments easier



CPU

Cortex-A5

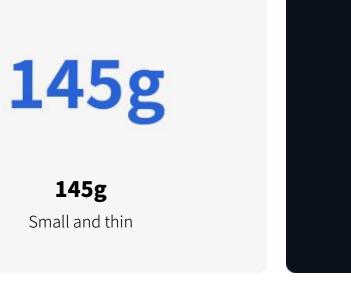





E-signature

Wireless communication

4G / 2G / wifi

Incomparable Performance

The high-performance CPU of NEW6260 lets small and medium businesses deal with complicated operations

flexibly and frictionless.

Easy Portability


NEW6260 is small and only weighs 145g for easy portability. E-signature displayed on a 2.4-inch colored touchscreen



E-signature

The 2.4-inch color touch screen provides an optimal platform for the execution of signatures.



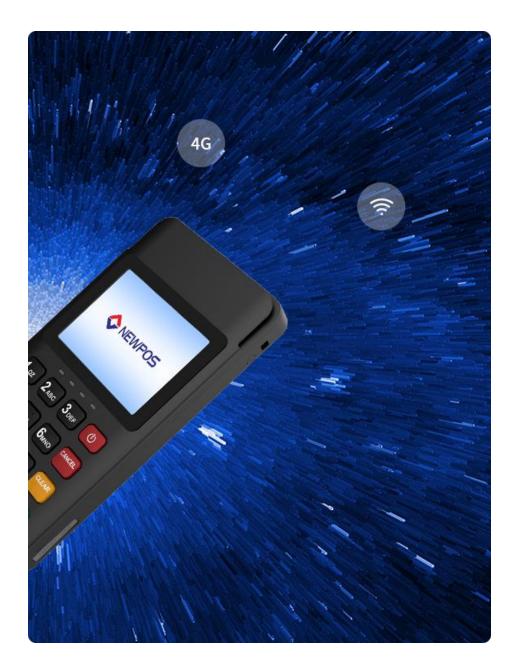

Multiple Reliable Wireless Connections

NEW6260 comes with multiple communications options including: 4G/2G/wifi. It can provide merchants with a small and various payment solution used in all interior and outer circumstances.

Enduring Power

NEW6260 can make 600 times transactions or standby 10 day on a single charge

Supporting All Payments

It supports various payment methods, such as magnetic card, IC card, contactless transaction and code scanning transaction. A machine can be used for various forms, making collection simple.



Flexible Adaptability



Dining room

Bookstore



Bar

Cafeteria

Specifications

CPU

Cortex-A5 500MHz

Card Reader

Magnetic Card Reader EMV Chip & PIN NFC Contactless

Memory

FLASH: 16MB SRAM: 16MB

Scanner

Optional, 0.3MP Camera Support 1D &2D Code scanning

Display

2.4"LCD,320X240 pixels Resistive Touchscreen Supports e-signature

Card Slots

1 Nano SIM 2 Nano SIM (optional) 1 SAM(optional)

Keypad

10 alphanumeric keys 5 function keys 1 power switch key

Communication

4G(LTE)/2G(GPRS) Optional WiFi(2.4GHz)

Peripheral Ports 1x Type-C USB2.0 Device **Battery** Rechargeable Liion battery 3.7V/800mAh Adapter/ Power Input: 100~240V AC,50Hz/60Hz Output:5V DC,1A

Dimensions

L×W×H (mm): 136X69X17.5 Weight: 145g

Audio

1 imes Buzzer

Storage Environment

Temperature: 20°C~60°C(-4°F~140°F) Humidity: 5%~95%(non-condense)

Working Environment

Temperature: 0°C~50°C(32°F~122°F) Humidity: 10%~90%(non-condense)

Certifications

PCIPTS 6.X,EMVL1&L2, EMV Contactless L1,Paypass, Paywave,American ExpressPay Discover D-PASAnatel,ABECS. CE,TQM,RoHS,etc.